


# VINCI L PRO

"The all new Vinci LED Spotlights is designed for professional retail lighting. The characteristic and unique design of the heat sink is created for modern needs and preferences for a flexible solution. Vinci is available in black and white finish and with a set of accessories. Developed and produced in Sweden".


LED-spotlight with passive cooling system.  
Die cast aluminium body, powder coat painted.  
Integral electronic driver. Integral heatsink.  
Rotation 365°. Vertical adjustment +/- 90°.  
Track mounted with 3-circuit adaptor.



<b>Class of protection</b>	IP20, class I
<b>Colours</b>	White, black
<b>Weight total</b>	2700g
<b>Reflector</b>	High purity aluminium
<b>Lifetime</b>	50.000h L80/B10 at Ta 25°C
<b>Mounting</b>	3-circuit universal adaptor
<b>Voltage</b>	220-240V 50-60Hz
<b>Ripple out. current</b>	< 4%. Flicker-free performance
<b>Qty per MCB</b>	Max 34pcs/MCB 16A type B
<b>Colour consistency</b>	3 SDCM
<b>Photobiological safety</b>	RG1
<b>Design</b>	Jesper Ståhl
<b>Dimming</b>	Not dimmable

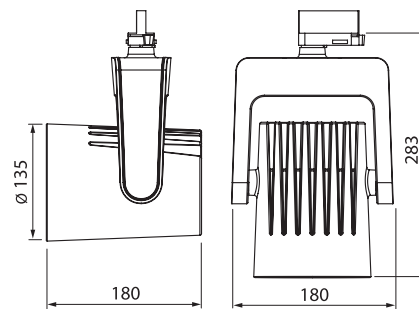

- White
- Black



## Accessories

Protective glass	204090
Honeycomb louvre	204091
Barndoors black	204092

# VINCI L PRO

Description	Reflector	LIGHTSOURCE			Load	Lumen	LUMINAIRE			ART. No.																																														
		CCT (K)	CRI	Lumen			Load	Lumen	Lm/W	○ White	● Black																																													
WARM WHITE 3000K (930)																																																								
Vinci L Pro 5000lm SP 930	Spot 14°	3000K	92	42W	5360	47W	4715	100		<b>2040210</b>	<b>2040214</b>																																													
Vinci L Pro 5000lm ME 930	Medium 26°	3000K	92	42W	5360	47W	4715	100		<b>2040211</b>	<b>2040215</b>																																													
Vinci L Pro 5000lm FL 930	Flood 40°	3000K	92	42W	5360	47W	4715	100		<b>2040212</b>	<b>2040216</b>																																													
<div style="display: flex; justify-content: space-around;"> <table border="1"> <caption>Spot 14°</caption> <thead> <tr><th>m</th><th>∅</th><th>Lux</th></tr> </thead> <tbody> <tr><td>1</td><td>0,26</td><td>37222</td></tr> <tr><td>2</td><td>0,51</td><td>9306</td></tr> <tr><td>3</td><td>0,77</td><td>4136</td></tr> <tr><td>4</td><td>1,02</td><td>2326</td></tr> </tbody> </table> <table border="1"> <caption>Medium 26°</caption> <thead> <tr><th>m</th><th>∅</th><th>Lux</th></tr> </thead> <tbody> <tr><td>1</td><td>0,46</td><td>16467</td></tr> <tr><td>2</td><td>0,92</td><td>4117</td></tr> <tr><td>3</td><td>1,39</td><td>1830</td></tr> <tr><td>4</td><td>1,86</td><td>1029</td></tr> </tbody> </table> <table border="1"> <caption>Flood 40°</caption> <thead> <tr><th>m</th><th>∅</th><th>Lux</th></tr> </thead> <tbody> <tr><td>1</td><td>0,67</td><td>9135</td></tr> <tr><td>2</td><td>1,35</td><td>2284</td></tr> <tr><td>3</td><td>2,02</td><td>1015</td></tr> <tr><td>4</td><td>2,70</td><td>571</td></tr> </tbody> </table> </div> <div style="display: flex; justify-content: space-around; margin-top: 20px;"> <div> <p><b>3000K 930</b> Spectral power distributions</p> <p>Relative intensity(a.u.)</p> <p>400 500 600 700nm</p> </div> </div>												m	∅	Lux	1	0,26	37222	2	0,51	9306	3	0,77	4136	4	1,02	2326	m	∅	Lux	1	0,46	16467	2	0,92	4117	3	1,39	1830	4	1,86	1029	m	∅	Lux	1	0,67	9135	2	1,35	2284	3	2,02	1015	4	2,70	571
m	∅	Lux																																																						
1	0,26	37222																																																						
2	0,51	9306																																																						
3	0,77	4136																																																						
4	1,02	2326																																																						
m	∅	Lux																																																						
1	0,46	16467																																																						
2	0,92	4117																																																						
3	1,39	1830																																																						
4	1,86	1029																																																						
m	∅	Lux																																																						
1	0,67	9135																																																						
2	1,35	2284																																																						
3	2,02	1015																																																						
4	2,70	571																																																						
NEUTRAL WHITE 4000K (940)																																																								
Vinci L Pro 5000lm SP 940	Spot 14°	4000K	92	42W	5780	47W	5080	107		<b>2040250</b>	<b>2040254</b>																																													
Vinci L Pro 5000lm ME 940	Medium 26°	4000K	92	42W	5780	47W	5080	107		<b>2040251</b>	<b>2040255</b>																																													
Vinci L Pro 5000lm FL 940	Flood 40°	4000K	92	42W	5780	47W	5080	107		<b>2040252</b>	<b>2040256</b>																																													
<div style="display: flex; justify-content: space-around;"> <table border="1"> <caption>Spot 14°</caption> <thead> <tr><th>m</th><th>∅</th><th>Lux</th></tr> </thead> <tbody> <tr><td>1</td><td>0,26</td><td>40128</td></tr> <tr><td>2</td><td>0,51</td><td>10032</td></tr> <tr><td>3</td><td>0,77</td><td>4459</td></tr> <tr><td>4</td><td>1,02</td><td>2508</td></tr> </tbody> </table> <table border="1"> <caption>Medium 26°</caption> <thead> <tr><th>m</th><th>∅</th><th>Lux</th></tr> </thead> <tbody> <tr><td>1</td><td>0,46</td><td>17745</td></tr> <tr><td>2</td><td>0,92</td><td>4436</td></tr> <tr><td>3</td><td>1,39</td><td>1972</td></tr> <tr><td>4</td><td>1,86</td><td>1109</td></tr> </tbody> </table> <table border="1"> <caption>Flood 40°</caption> <thead> <tr><th>m</th><th>∅</th><th>Lux</th></tr> </thead> <tbody> <tr><td>1</td><td>0,67</td><td>9851</td></tr> <tr><td>2</td><td>1,35</td><td>2463</td></tr> <tr><td>3</td><td>2,02</td><td>1095</td></tr> <tr><td>4</td><td>2,70</td><td>616</td></tr> </tbody> </table> </div> <div style="display: flex; justify-content: space-around; margin-top: 20px;"> <div> <p><b>4000K 940</b> Spectral power distributions</p> <p>Relative intensity(a.u.)</p> <p>400 500 600 700nm</p> </div> </div>												m	∅	Lux	1	0,26	40128	2	0,51	10032	3	0,77	4459	4	1,02	2508	m	∅	Lux	1	0,46	17745	2	0,92	4436	3	1,39	1972	4	1,86	1109	m	∅	Lux	1	0,67	9851	2	1,35	2463	3	2,02	1095	4	2,70	616
m	∅	Lux																																																						
1	0,26	40128																																																						
2	0,51	10032																																																						
3	0,77	4459																																																						
4	1,02	2508																																																						
m	∅	Lux																																																						
1	0,46	17745																																																						
2	0,92	4436																																																						
3	1,39	1972																																																						
4	1,86	1109																																																						
m	∅	Lux																																																						
1	0,67	9851																																																						
2	1,35	2463																																																						
3	2,02	1095																																																						
4	2,70	616																																																						

Luminous flux and connected electrical load are subject to an initial tolerance of +/- 5%.  
Tolerance of color temperature: +/-150 K. Values apply to an ambient temperature of 25°C.